


Typ 1A1

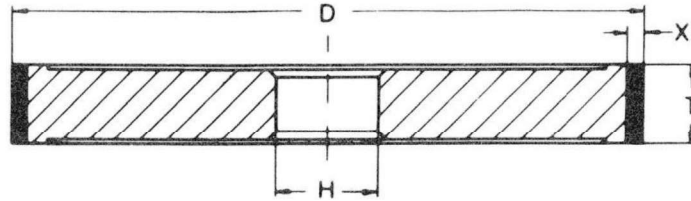

Příklad objednávky

| Typ | D | T | X | H | Zrnitost | Pojivo | Koncentrace |
|-----|-----|----|---|----|----------|--------|-------------|
| 1A1 | 150 | 10 | 2 | 20 | D126 | K | 100 |

| D | T | X | H | |
|-----|------------------------|------------------------------|---------------|---|
| 20 | 4- 6- 8-10 | Kovové pojivo 2-3-4 mm | Upínací otvor | |
| 25 | 4- 6- 8-10 | | | |
| 40 | 4- 6- 8-10 | | | |
| 50 | 4- 6- 8-10 | | | |
| 75 | 4- 5- 6- 8-10-12 | | | |
| 100 | 4- 5- 6- 8-10-12 | | | |
| 125 | 4- 5- 6- 8-10-12-15 | | | |
| 150 | 4- 5- 6- 8-10-12-15-20 | | | |
| 175 | 6- 8-10-12-15-20 | | | |
| 200 | 6-8-10-12-15-20 | | | Pryskyřičné pojivo 1-1,5-2-3-4 mm |
| 250 | 10-15-20-30-40 | | | |
| 300 | 15-20-30-40 | | | |
| 350 | 15-20-30-40 | | | |
| 400 | 20-30-40 | | | |
| 450 | 20-30-40 | | | |
| 500 | 20-30-40 | | | |
| 525 | 20-30-40 | | | |